

SIGN TYPE COUNT

Sign Type	Mount Type	Quantity
N02A	Screw Mount	42
N02A	Tape Mount	7
N03A	Screw Mount	13
N03A	Tape Mount	2
N03B	Screw Mount	2
N04A	Screw Mount	54
N04A	Tape Mount	7
N05A	Screw Mount	34
N05A	Tape Mount	4
N05A Glass Backer	Tape Mount	4
N06A	Screw Mount	8
N07	Screw Mount	31
N08	Screw Mount	4
N09	Screw Mount	18
N10B	Screw Mount	11
N10B-1	Screw Mount	1
N10B-2	Screw Mount	5
N11A	Screw Mount	32
N11A	Tape Mount	3
N11A Glass Backer	Tape Mount	2
N12A	Screw Mount	16
N13	Screw Mount	8
N16	Screw Mount	3
N16	Tape Mount	2
N16 Glass Backer	Tape Mount	2
N17A	Screw Mount	1
N18	Screw Mount	17
N24A	Screw Mount	1
N24B	Screw Mount	1
N28	Screw Mount	12



N32	Screw Mount	9
N32B	Screw Mount	11
N34	Screw Mount	17
N35	Screw Mount	2
N36	Screw Mount	1
X02	Tape Mount	6
X02 Glass Backer	Tape Mount	1
X03	Tape Mount	3
X09	Tape Mount	5
Exterior Main Building Sign	Letters Mounted to Aluminum Bar; Bar Mounted to Roofline	(48) Letters on (2) Bars; (1) Bar has (22) Letters, (1) Bar has (26) Letters



COLOR SCHEME DRAWING/DETAILS

COPY STYLE

HELVETICA REGULAR AaBbCcDdEeFfGgHhiJjKkLlMmNnOoPpQqRr1234567890 STANDARD FINISH















Employee Name

N05 8.375" x 9"



9.75" x 9"



NO7 12.75" x 11"



N10B.2 22.5" x 14"

STAIR 1

B THROUGH 5 ROOF ACCESS AUTHORIZED PERSONS ONLY NO STANDPIPE


LEVEL

个EXIT UP AT FIRST FLOOR



INTERIOR


I) N02A: 9.75" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign includes .060" Lexan Painted Backer and I/8" Lexan Painted Face/Frame. A Mask and Paint Line is included, 2.875" from Top of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

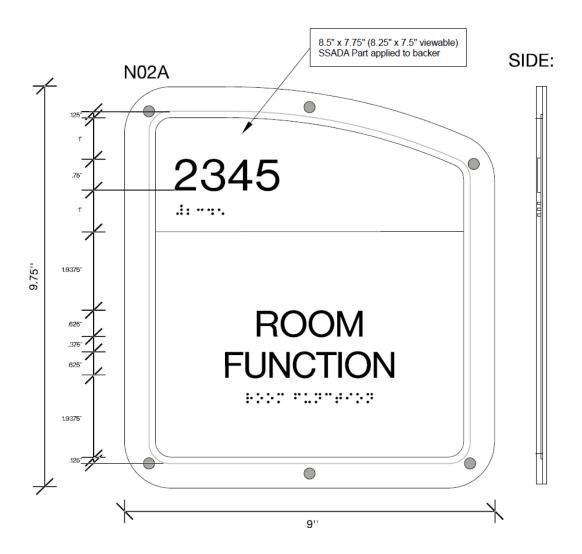



INTERIOR


2) N03A/N03B: 12.25" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign includes .060" Lexan Painted Backer and 1/8" Lexan Painted Face/Frame. Mask and Paint Lines are included, 2.875" from Top of Sign and 2.125" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

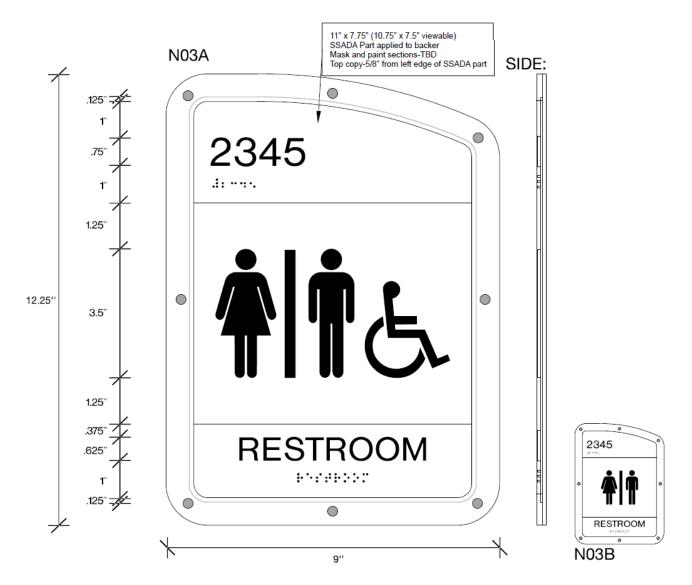



INTERIOR


3) N04A: 10.875" X 9" Sign with Subsurface ADA Helvetica Regular Copy and a Laser Printed Inserts. Sign includes .060" Lexan Painted Backer and Spacers and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

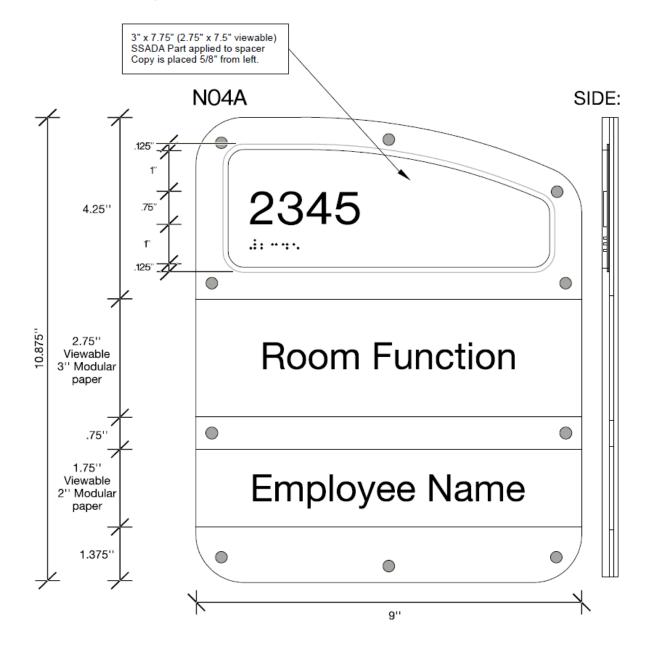



INTERIOR


4) N05A: 8.375" X 9" Sign with Subsurface ADA Helvetica Regular Copy and a Laser Printed Insert. Sign includes .060" Lexan Painted Backer and Spacers and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

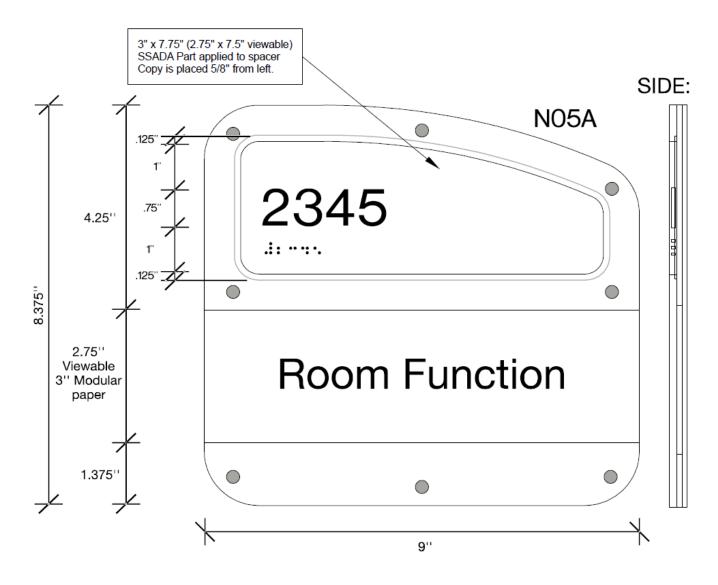



INTERIOR


5) N06A: 9.75" X 9" Sign with Subsurface ADA Helvetica Regular Copy and a Laser Printed Insert. Sign includes .060" Lexan Painted Backer and Spacers and I/8" Lexan Painted Face/Frame. The Slider is I/8" Acrylic routed in the Tab. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

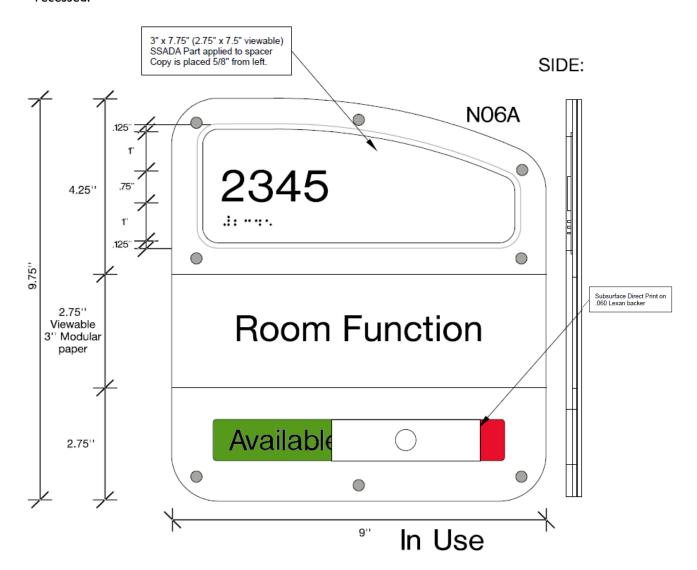



INTERIOR

6) N07: 12.75" X 11" Sign with Subsurface Direct Print Helvetica Regular Copy and a Laser Printed Graphic Insert. Sign includes .060" Lexan Painted Backer and Spacers and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

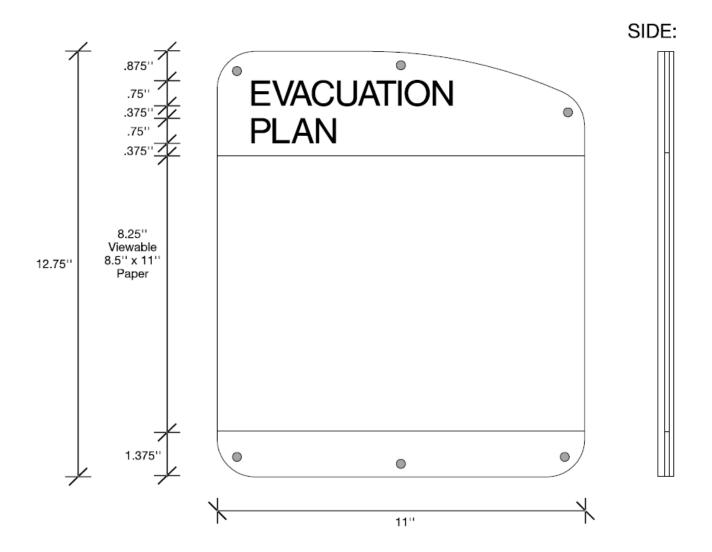



6A) N07 Map Details:

Total of (31) Maps (26) Evacuation Maps

(5) Courtyard Wayfinding Maps

Courtyard Wayfinding Signs:

The Courtyard Wayfinding Signs are as follows. These signs should be detailed with a blue path and <u>do not need</u> any evacuation details identified such as fire extinguishers, pull stations, etc.

01-N07-08

01-N07-10

01-N07-12

01-N07-14

01-N07-15

Evacuation Maps:

The Evacuation Maps are as follows. Please see below for information pertaining to the Evacuation Maps.

B-N07-01

B-N07-02

B-N07-03

01-N07-01

01-N07-02

01-N07-03

01-N07-04

01-N07-05

01-N07-06

01-N07-07

01-N07-09

01-N07-11

01-N07-13

01-N07-16

01-N07-17

01-N07-18

01-N07-19

01-N07-20

02-N07-01 02-N07-02

02-N07-03

02-1107-03

02-N07-04

03-N07-01

03-N07-02

03-N07-03

03-N07-04

Key Details utilized on the Building I Maps:

- I. Star- You Are Here
- 2. Solid Round Symbol- Fire Extinguisher
- 3. "P"-Pull Station



- 4. Solid Line with Arrow- Primary Evacuation Route
- 5. Dashed Line with Arrow- Secondary Evacuation Route
- 6. International Symbol for Wheelchair Access-In Stair 5 on all Floors

Facility Information to be included:


- I. Building Name- Hutchings Adult Inpatient Services
- 2. Address- 620 Cedar Street, Syracuse, NY 13210
- 3. Emergency Phone Number- 4000

RACE information should be included with the Maps.



INTERIOR


7) N08: 17.25" X 11" Sign with Subsurface ADA Helvetica Regular Copy. Sign includes a .060" Lexan Painted Backer and 1/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.625" from Top of Sign and 7.365 from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

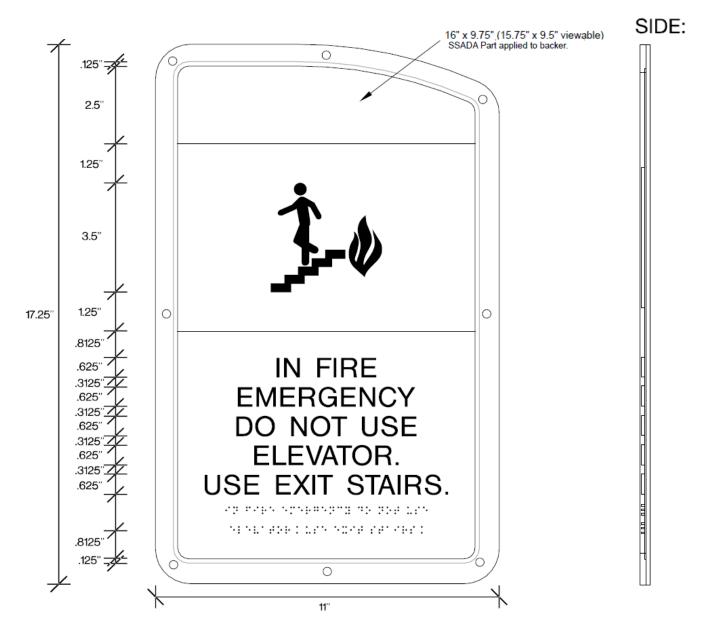



INTERIOR


8) N09: 12.25" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign includes a .060" Lexan Painted Backer and I/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.875" from Top of Sign and 2.125" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

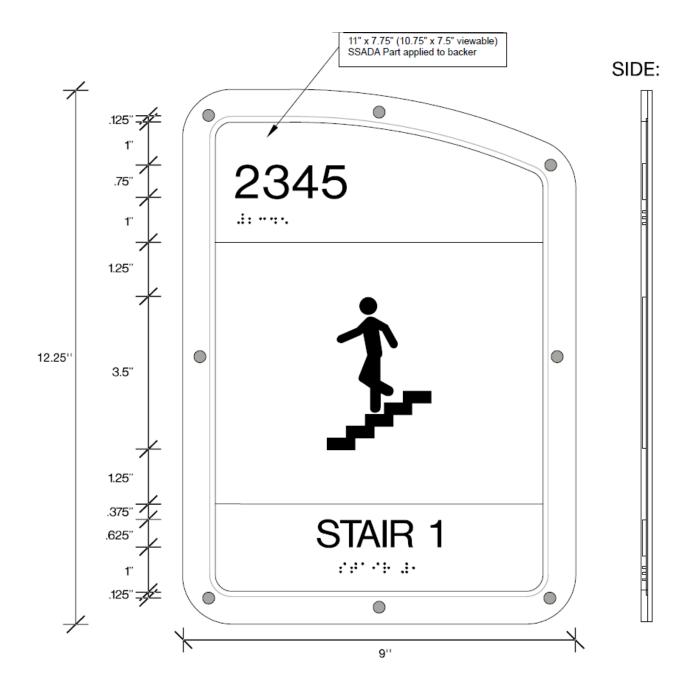



INTERIOR


9) N10B: 19" X 14" Sign with Subsurface Direct Print Helvetica Regular Copy. Sign is made of Painted 1/8" Lexan. A Mask and Paint Line is included 3.125" from Top of Sign. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

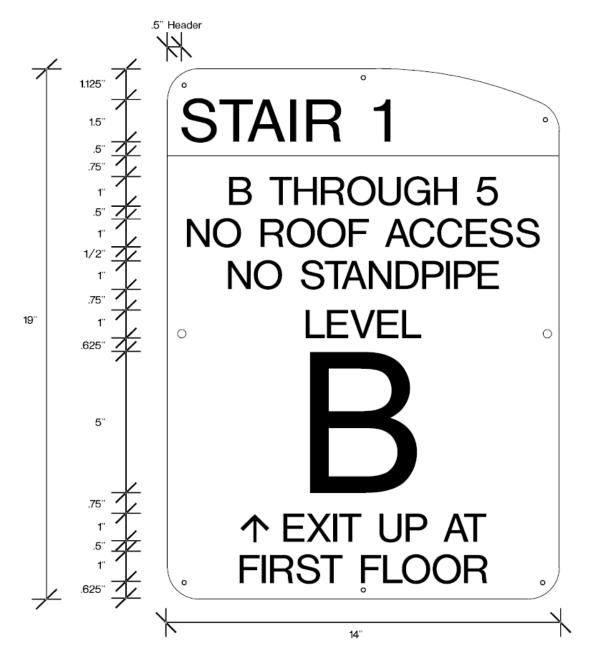



INTERIOR


10) N10B-1: 21.5" X 14" Sign with Subsurface Direct Print Helvetica Regular Copy. Sign is made of Painted 1/8" Lexan. A Mask and Paint Line is included 3.125" from Top of Sign. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

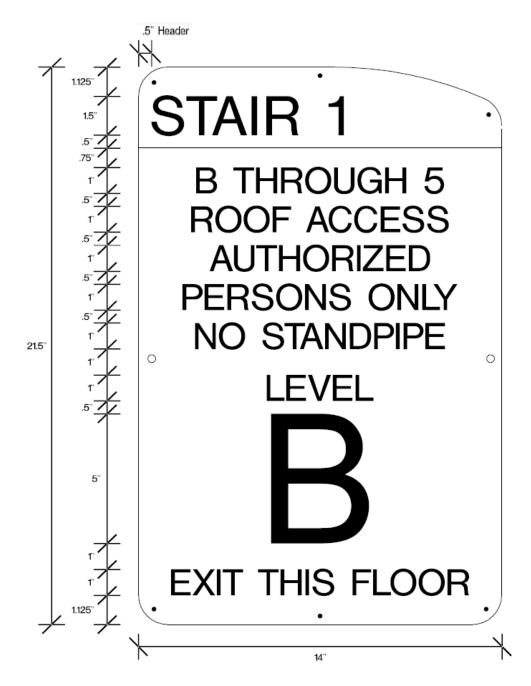



INTERIOR


11) N10B-2: 22.5" X 14" Sign with Subsurface Direct Print Helvetica Regular Copy. Sign is made of Painted 1/8" Lexan. A Mask and Paint Line is included 3.125" from Top of Sign. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

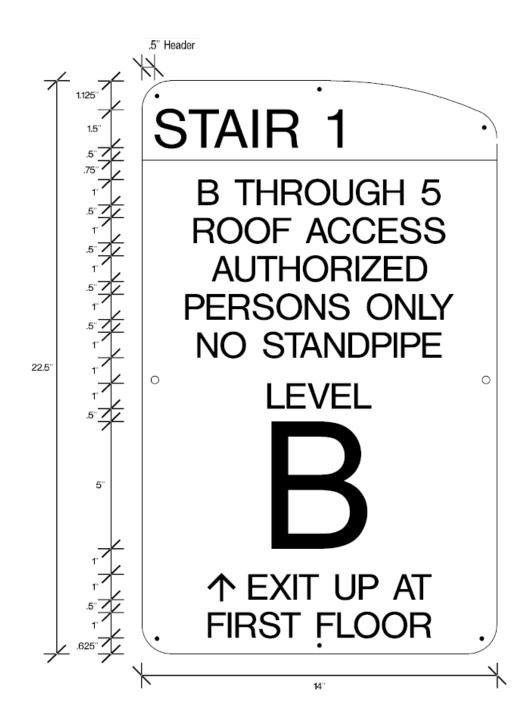



INTERIOR


12) N11A: 9" X 8.5" Sign with Subsurface Direct Print Helvetica Regular Copy. Sign is made of Painted1/8" Lexan. A Mask and Paint Line is included 3" from Top of Sign. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

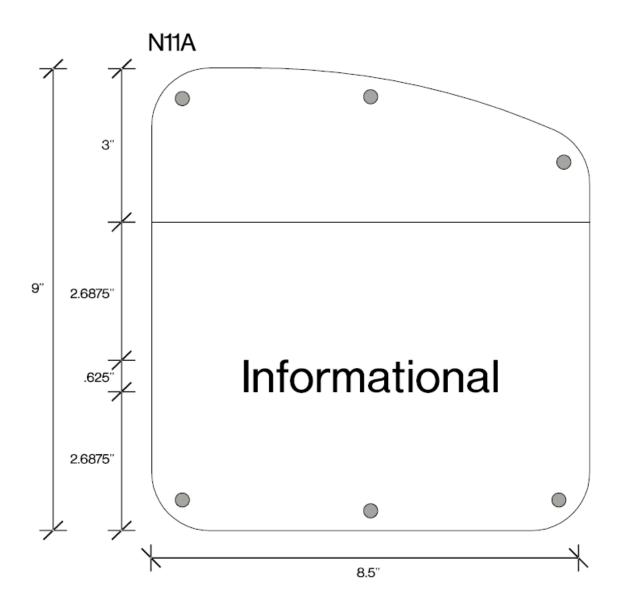



INTERIOR


13) N12A: 25.875" X 17" Sign with Subsurface Direct Print and Laser Printed Inserts with Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and Spacers and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

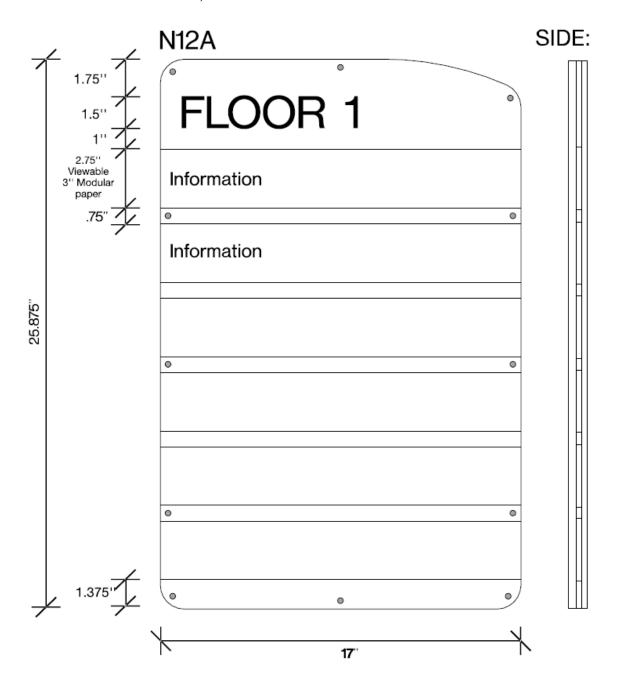



INTERIOR


14)N13: 14" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and 1/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.875" from Top of Sign and 3.875" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

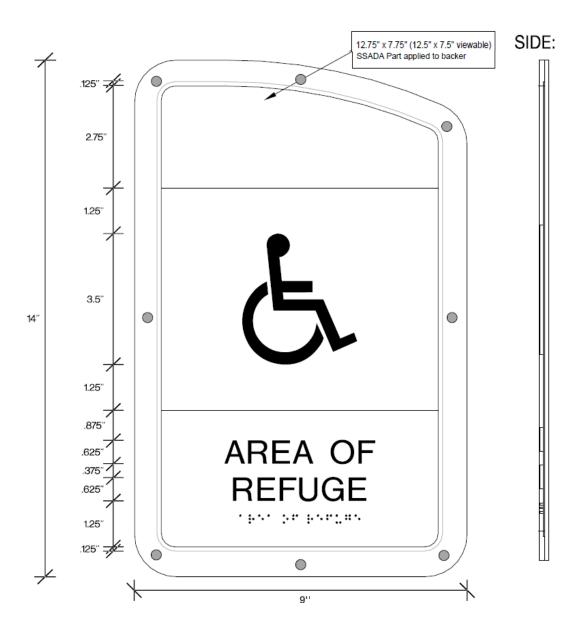



INTERIOR


15)N16: 12.25" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and Spacers, and 1/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.875" from Top of Sign and 2.125" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

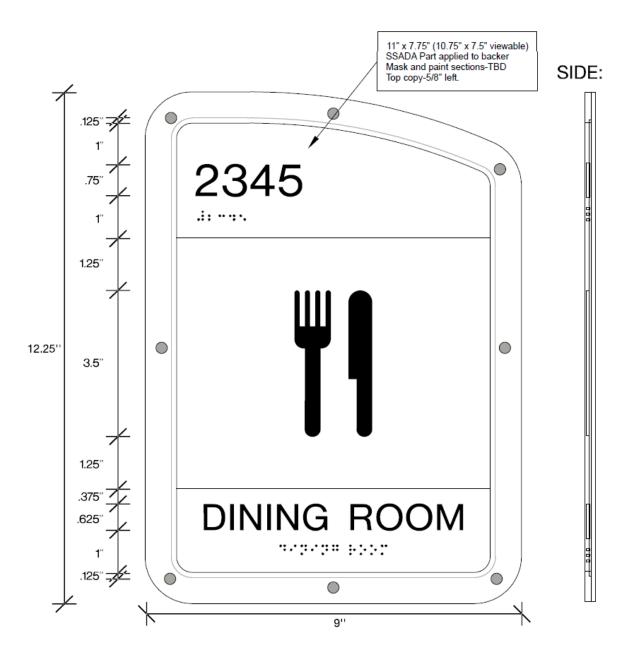



INTERIOR


16) N17A: 15.25" X 8.5" Sign with Subsurface Direct Print and Laser Printed Insert with Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and Spacers, and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

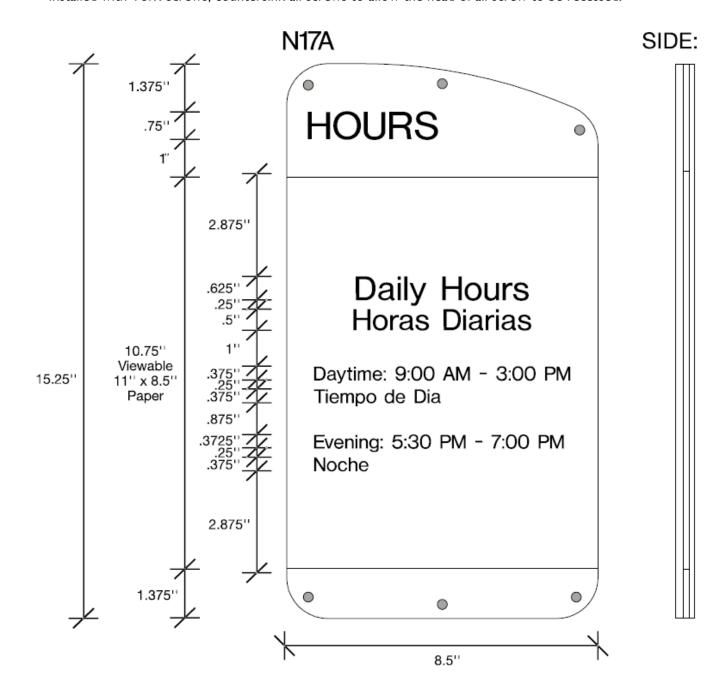



INTERIOR


17)N18: 13.75" X 9" Sign with Subsurface ADA and Laser Printed Inserts with Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and Spacers, and 1/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

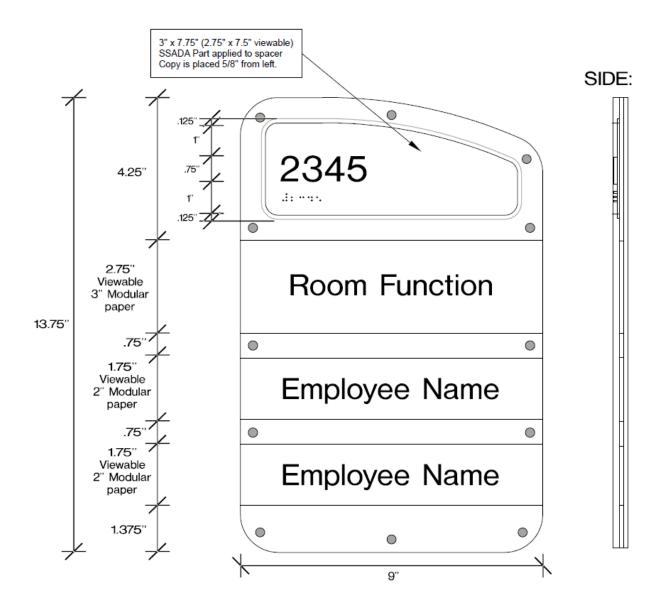



INTERIOR


18) N24A/N24B: 14" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign has .060" Lexan Painted Backer and I/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.875" from Top of Sign and 3.875" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

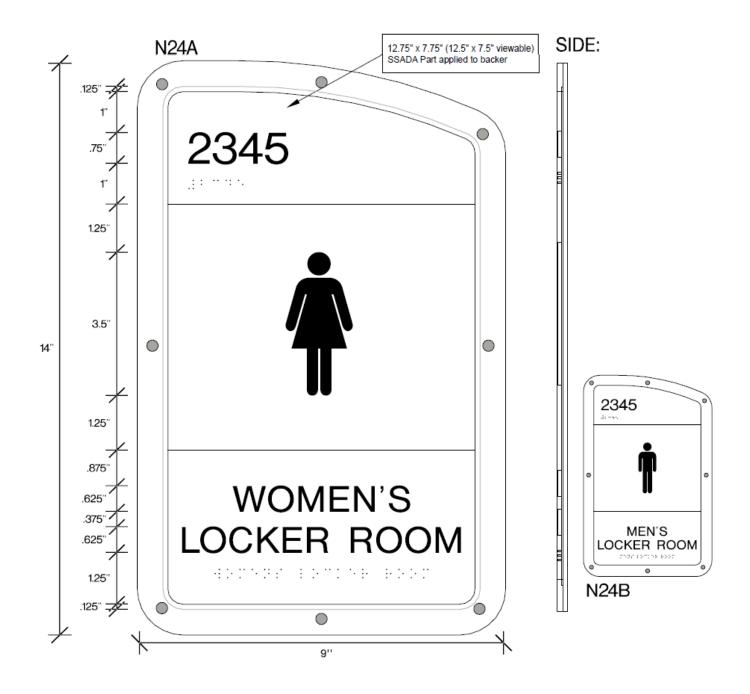



INTERIOR

19) N28: 9.75" X 11" Sign with Subsurface Direct Print Helvetica Regular Copy. Sign is made of 1/8" Painted Lexan. A Mask and Paint Line is included 3.125" from Top of Sign. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

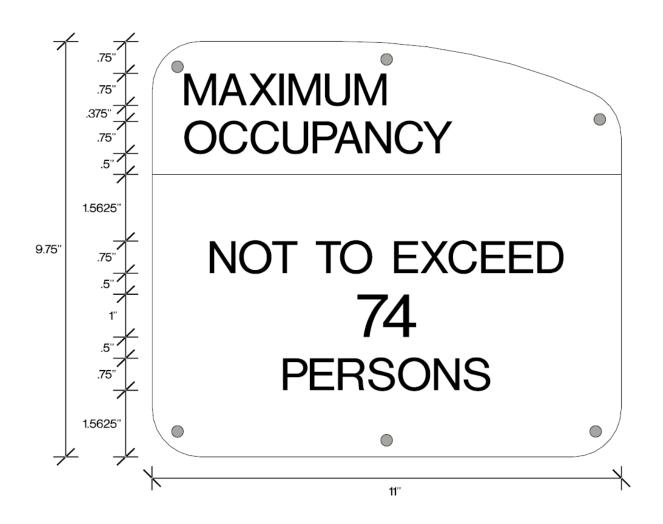



INTERIOR


20)N32A/N32B: 14" X 9" Sign with Subsurface ADA Helvetica Regular Copy. Sign has a .060 Lexan Painted Backer and I/8" Lexan Painted Face/Frame. Mask and Paint Lines are included 2.875" from Top of Sign and 3.875" from Bottom of Sign (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.





INTERIOR


21)N34: 13" X 10.75" Sign with Subsurface ADA Helvetica Regular Copy. Sign has a .060 Lexan Painted Backer and I/8" Lexan Painted Face/Frame. A Mask and Paint Line is included 3.625" from Top of Sign. (not including .63" sign border). Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

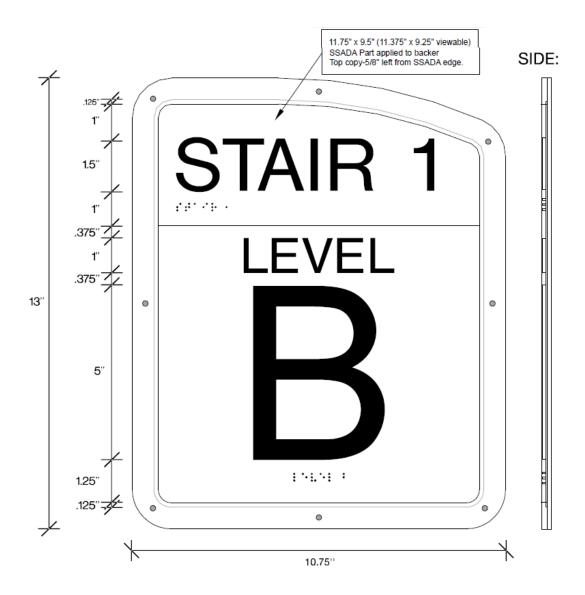



INTERIOR


22)N35: 15.875" X 9" Sign with Subsurface ADA and Laser Printed Inserts with Helvetica Regular Copy. Sign has a .060 Lexan Painted Backer and Spacers and I/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

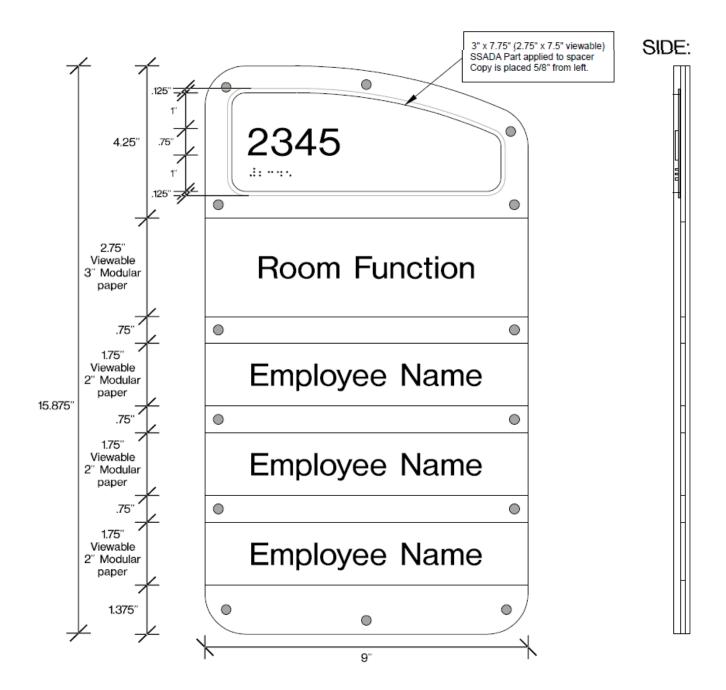



INTERIOR


23)N36: 18.375" X 9" Sign with Subsurface ADA and Laser Printed Inserts with Helvetica Regular Copy. Sign has a .060 Lexan Painted Backer and Spacers and I/8" Lexan Painted Face/Frame. Screw mount signs must be installed with Torx Screws; countersink all screws to allow the head of all screw to be recessed.

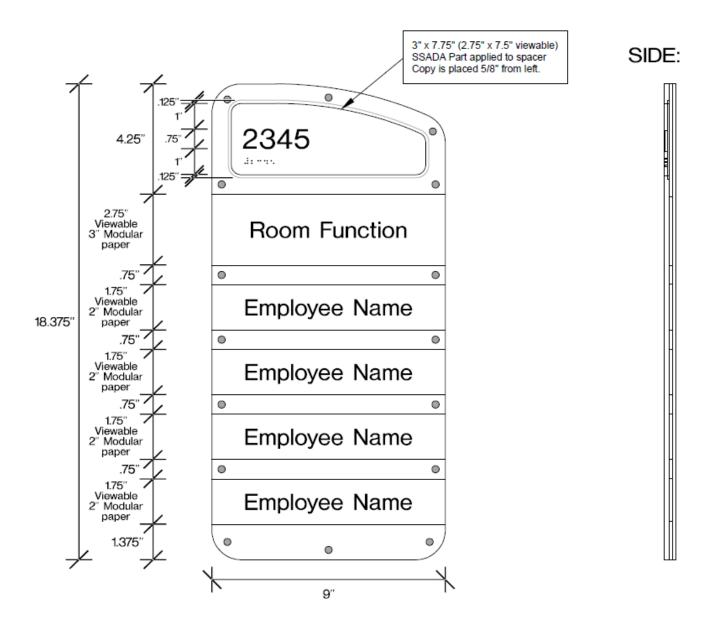



EXTERIOR


24)X02: 9" X 8.5" Sign with Exterior Subsurface Helvetica Regular Copy. Sign has a .020 Exterior Grade Lexan Painted Face with .093 ABS Backer. A Mask and Paint Line is included 3" from Top of Sign.

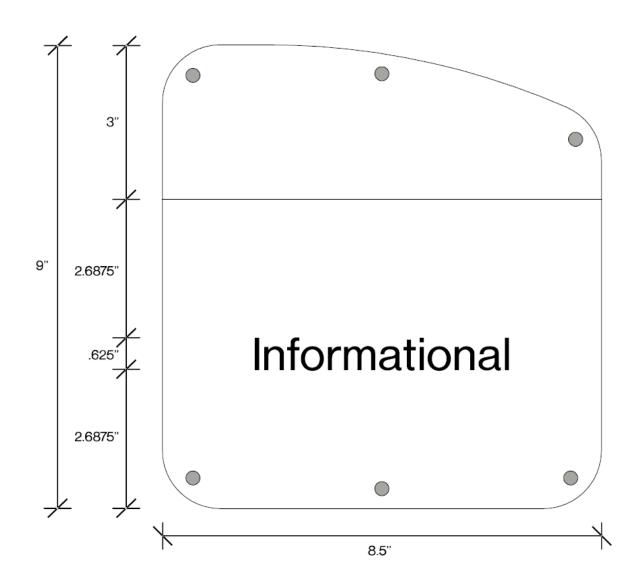



EXTERIOR


25)X03: 9" X 8.5" Sign with Exterior Subsurface Helvetica Regular Copy. Sign has a .020 Exterior Grade Lexan Painted Face with .093 ABS Backer. A Mask and Paint Line included 3" from Top of Sign.

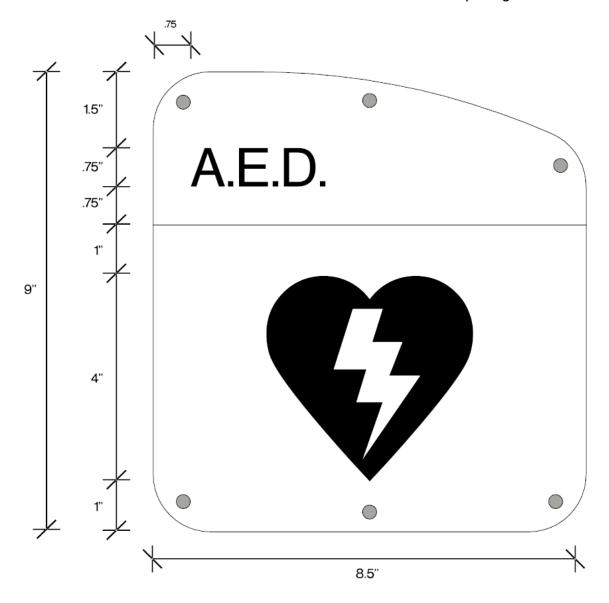



EXTERIOR

26) X09: 12.25" X 9" Sign with Exterior Grade Photopolymer Helvetica Regular Copy. Sign has a .020 Exterior Grade Lexan Face with .093 ABS Backer. Mask and Paint Lines are included 3.5" from Top of Sign and 2.75 from Bottom of Sign.

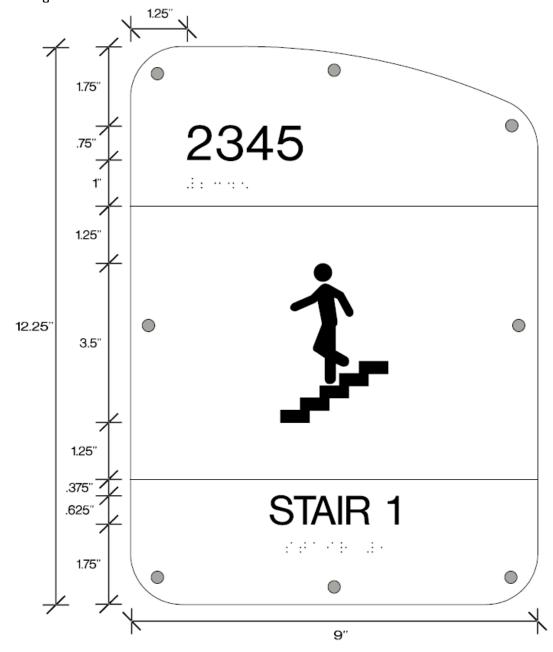



EXTERIOR

27) Main Building Name Exterior Sign: 6"H Flat Cut 3/8" Thick Aluminum Letters. Horizontal Brush Finish Face. Helvetica Bok Copy. Letters are to be Flush Stud Mounted onto a Silver Painted Aluminum Bar. Bar will be mounted to the Roofline.

