



ADDENDUM NO.: 3

IFB or RFP NO.: 673

Description: Install Data Cabling and Wiring

Project: DASNY

Bid Opening Date: May 27, 2020

Specifics of the Addendum: Provide answers to questions asked during the RFI period

QUESTION: The specs call for using the T568A standard for terminations. We would like to confirm this since most in the industry use T568B.


ANSWER: T568B can be substituted without issue as long as both ends use the same termination scheme.

QUESTION: For the cubicles; the data jack faceplates, is that being provided by the furniture vendor or are we supposed to supply that? If yes, can we get the specs for the cubicles?


ANSWER: See attached specification which also include color selections fog and slate.

All other terms and conditions of the original Invitation for Bids or Request for Proposals shall remain the same. This notice shall be signed and attached to the Invitation for Bids and shall form a part of your bid.


Base Horizontal Frame Packages—Thin Trim, continued



Feed-through horizontal connecting bar cable sleeves can be added in the field to finish the exposed metal edges of vertical cable pass-through openings.



Knockouts in base trim can be removed in the field where needed. Knockout dimensions are 1³/₈"H by 2⁵/₈"W.



Communication outlets attach to openings in panel base trim. Order communication outlets from an outside vendor. Knockouts for communication in base accommodate modular furniture size only.

Surface Materials

Top cap and base trim

- Paint color chosen on base trim will also apply to the top cap. They are not chosen independently.
- Wood veneer (option)

Tip: Answer panel wood trims are only available with quarter-cut finishes with the exception of maple finishes. Maple on wood trims is only available with flat-cut finishes. For ordering simplicity, both flat-cut and quarter-cut finishes can be specified on panel trims. However, for all finishes except maple, if a flat-cut finish is selected, the trims will have the coordinating quarter-cut finish. For maple finishes, if quarter-cut is selected, the trims will have the coordinating flat-cut finish. Blending panel trims with other wood products that have flat-cut finishes will be visually acceptable for most applications. If a more exact match is desired for non-maple finishes, please specify quarter-cut finishes for the entire project. If a more exact match is desired for maple finishes, please specify flat-cut finishes for the entire project.

Horizontal connecting bars

- Black paint
- Tip: Components are hidden when properly installed.*

Application Topics

Use a cable tray to provide extra support for 60"W and 72"W full skins where people may lean against the panel.

Base Horizontal Frame Packages—Thin Trim


Base horizontal frame packages include horizontal connecting bars that lock into vertical junctions and complete the structure of a panel. A top cap and pair of base trims are also included. Cable tray and base cable tray are available as options.

► Specifying, page 390

Top cap snaps onto top of panel skins. Top caps to accommodate change-of-height are also available. Wood veneer is available as an option.

Quick lock connects horizontal bars to vertical junctions for quick assembly.

Horizontal connecting bars lock into vertical junctions. The top bar can be lowered to a maximum of 24" from the top position. The bottom bar must always be positioned in the lowest slot in a junction.

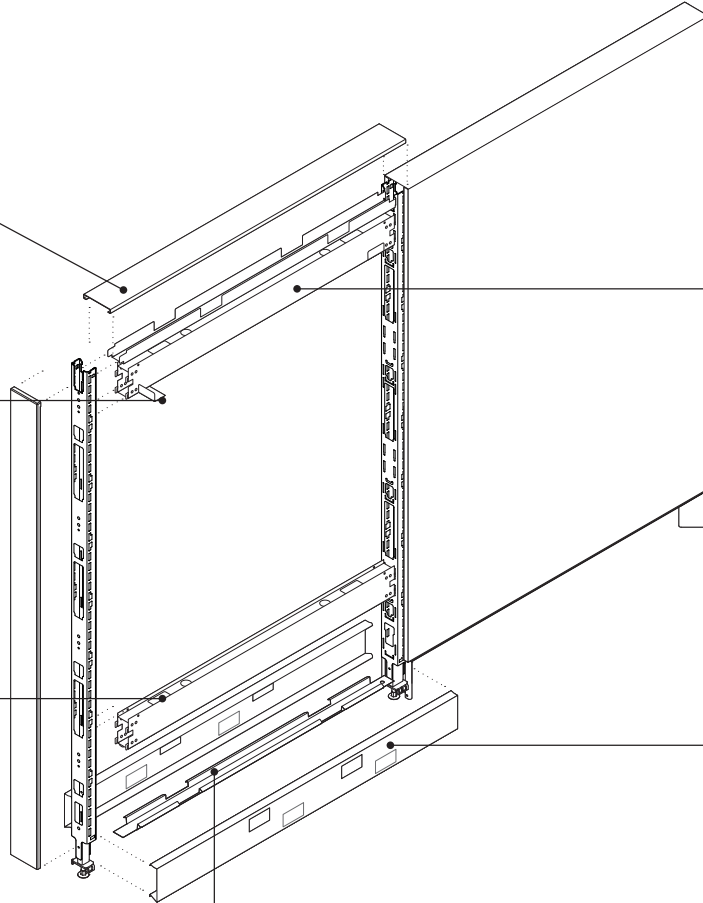

Optional cable tray can be used for additional support of cables. Additional cable trays can be installed and arranged at various heights within the frame for communications access and cable routing.

Base trim or open base trim styles are available on panels with Thin trim.

Base trim with knockouts accommodates power and communication terminations. Top knockout is for power, bottom knockout is for communication. Filler to close unused openings is available from Service Parts (TS7BTFSR).

Optional base cable tray can be used to support lay-in of cables.

Actual Dimensions

Width 17¹³/₁₆" , 23¹³/₁₆" , 29¹³/₁₆" , 35¹³/₁₆" , 41¹³/₁₆" , 47¹³/₁₆" , 59¹³/₁₆" , and 71¹³/₁₆"

Base trim height 3³/₄"

Receptacle Opening

Width of opening 2⁵/₈"


Height of opening 1³/₈"

Duplex Receptacles




► Specifying, page 515


Product Details



15-amp or 20-amp receptacles, ordered separately, snap into both faces of power block in the field.



Orange triangle indicates to users the receptacles that are connected to isolated grounds.



Controlled receptacle must be indicated when tying into the building management system. Duplex receptacles have an option for a factory permanent, pad stamp power icon symbol with the word controlled per compliance with the Energy Code.

Surface Materials

Duplex receptacle


- 6000 Black
- 6009 Arctic White
- 6249 Platinum Solid
- 6651 Tungsten
- 6652 Titanium
- 6654 Sand
- 6697 Fog
- 6B03 Red

USB Receptacles




► Specifying, page 516

Product Details



USB receptacles, ordered separately, snap into both faces of power block in the field.



USB receptacles, are available in three wiring schematics with multiple line options. USB receptacles offer easy access to two charging ports. Each port provides one ampere of output. USB receptacles conveniently charge a wide range of electronic devices. Some devices may not be compatible.

Surface Materials

USB receptacle


- 6000 Black
- 6009 Arctic White
- 6249 Platinum Solid
- 6651 Tungsten
- 6652 Titanium
- 6654 Sand
- 6697 Fog
- 6B03 Red

Faceplate




► Specifying, page 517


Product Details



Faceplate, ordered separately, is used to surround receptacle when skin is field-cut. Templates for field cutting are available through Service Parts (T500940SR).



Faceplate is used to surround modular furniture size communication or DECORA outlets when installed in the face of a tackable acoustical panel skin. Templates for field cutting are available through Service Parts (T500940SR).



NEMA-size communication outlets (single gang) do not require a Steelcase faceplate. Cannot be used in base.

Surface Materials

Faceplate

- 6000 Black
- 6009 Arctic White
- 6249 Platinum Solid
- 6651 Tungsten
- 6652 Titanium
- 6654 Sand
- 6697 Fog

