



**ADDENDUM NO.:** 1 to Rebid

**IFB or RFP NO.:** 704

Description: Furnish and install markerboards

Project: Queens College

Bid Opening Date: September 29, 2021

Questions and Answers:

Q1. Will drawings be submitted of encapsulated existing conditions?

A1. The back of the existing markerboards has received gypsum board in RO 101 already. Room 100 will receive the same treatment. Contractor is to provide dwg for the preparation of the area to receive new markerboards

Q2. Is mounting to flush wall condition without an inset an option?

A2. The markerboard to be installed on the back wall can be without an inset. The sliding boards are to have an inset frame.


Q3. Are 3 sliding boards acceptable?

A3. If the markerboards are vertical, two are acceptable. If they run horizontally, three will be needed. In both solutions a fixed board on the back must be installed (see attached drawings below).


Q4. Would we be able to advise the in-house contractor as to how to prepare the opening?

A4. Yes, coordination with QC carpenter can be coordinated.

**REMSEN HALL – LECTURE HALLS 100 & 101 VERTICAL SLIDING MARKERBOARDS**

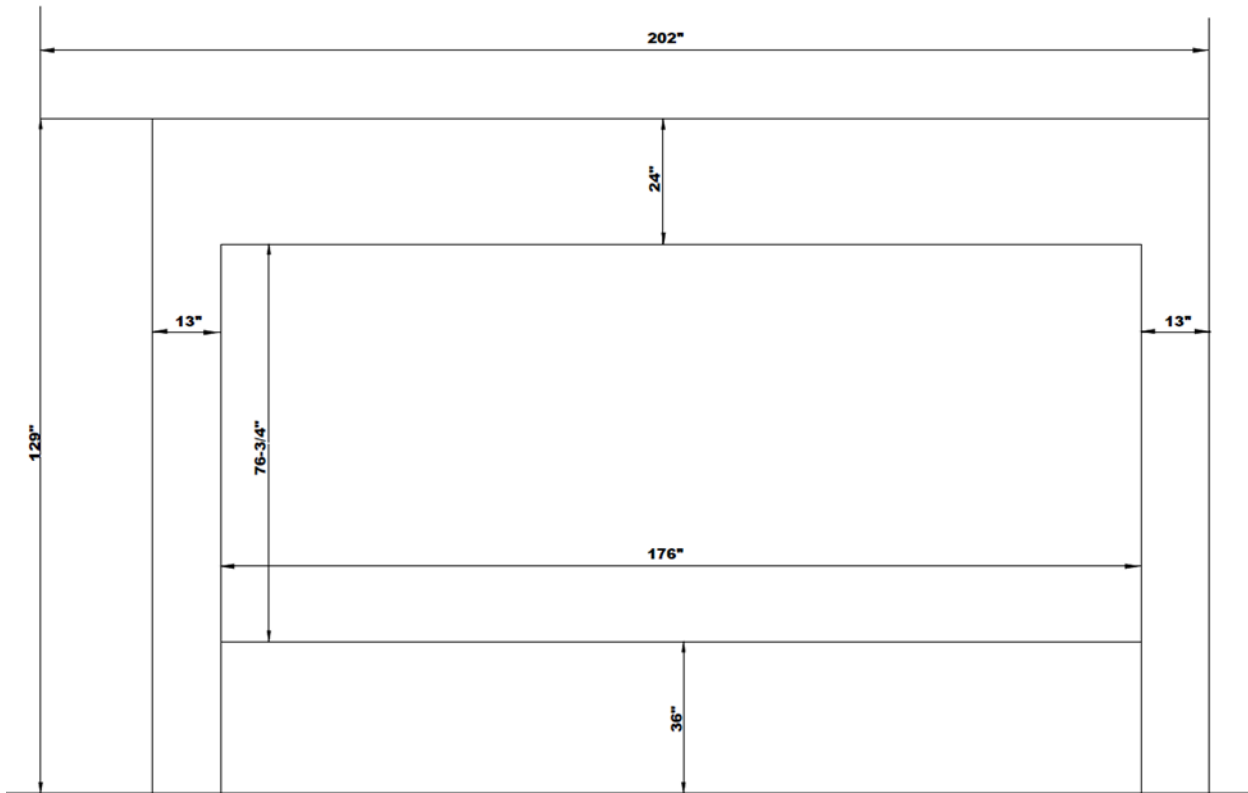

**REMSEN 100 - VERTICAL MARKERBOARDS**

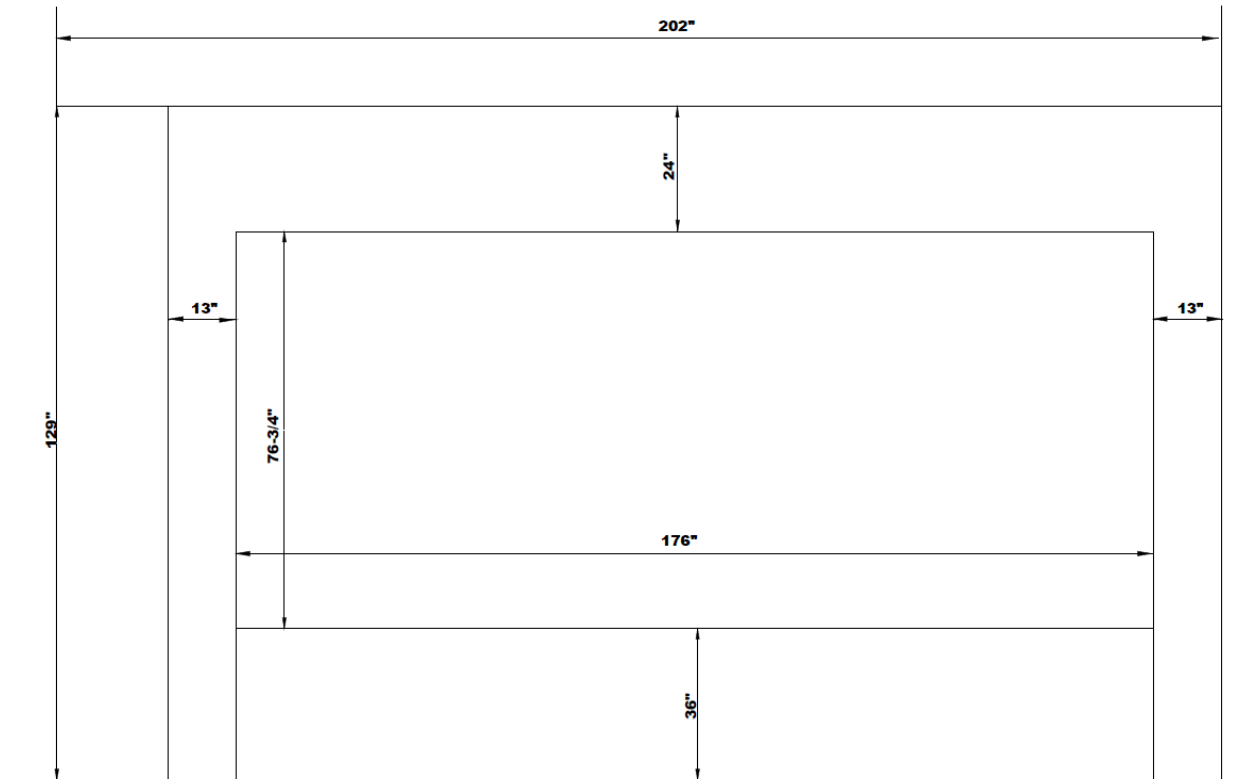

**REMSEN 101 - VERTICAL MARKERBOARDS**

**NOTES:**

Revised 7-13

- **BOTH ROOMS TO RECEIVE A FIXED MARKERBOARD IN THE BACK AND TWO SLIDER BOARDS ON THE FRONT THE WHOLE LENGTH AND HEIGHT OF THE EXISTING MARKERBOARDS OPENING.**
- **VERTICAL SLIDING MARKERBOARDS MATERIAL: CERAMIC**
- **CONTRACTOR TO SUPPLY DWGS TO PREP THE BACK AND SIDES OF THE OPENING AS WELL AS DIRECTIONS TO INSTALL FRAME.**



- **CONTRACTOR TO SUPPLY MATERIAL TO INSTALL THE FRAME.**



All other terms and conditions of the original Invitation for Bids or Request for Proposals shall remain the same. This notice shall be signed and attached to the Invitation for Bids and shall form a part of your bid.